


### RWU35-F-H [🔗](#)

#### 循环滚子轴承滑块

带满装循环滚珠导引系统的标准滑块, 用于直线循环滚珠轴承和导轨组件, 用于油润滑或脂润滑

#### 技术信息




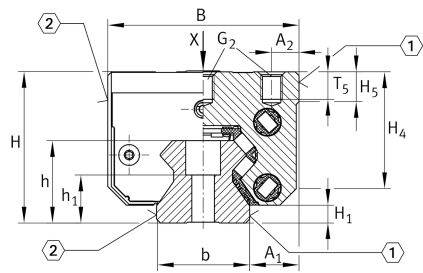


#### 主要尺寸和性能数据

|                 |           |                                   |
|-----------------|-----------|-----------------------------------|
| H               | 55 mm     | height system                     |
| B               | 70 mm     | width carriage                    |
| L               | 122.9 mm  | overall length carriage           |
| C               | 59,000 N  | dynamic load rating               |
| C <sub>0</sub>  | 140,000 N | dynamic load rating               |
| M <sub>0x</sub> | 1,200 Nm  | static moment rating about X axis |
| M <sub>0y</sub> | 2,150 Nm  | static moment rating about Y axis |
| M <sub>0z</sub> | 1,950 Nm  | static moment rating about Z axis |
| ≈m              | 1.67 kg   | 重量                                |



### 安装尺寸

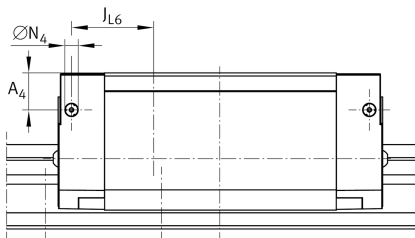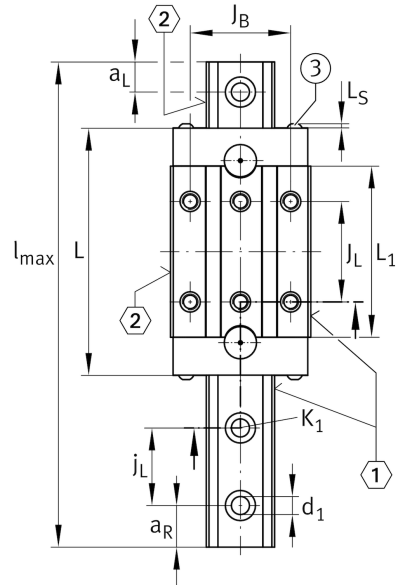

|                               |         |                                                                      |
|-------------------------------|---------|----------------------------------------------------------------------|
| A <sub>1</sub>                | 18 mm   | Distance from locating edge on carriage to locating edge on guideway |
| J <sub>B</sub>                | 50 mm   |                                                                      |
| b                             | 34 mm   | width rail                                                           |
| A <sub>2</sub>                | 10 mm   | Distance from locating edge to hole                                  |
| L <sub>1</sub>                | 85.2 mm |                                                                      |
| L <sub>S</sub>                | 2.2 mm  |                                                                      |
| J <sub>L</sub>                | 50 mm   |                                                                      |
| H <sub>1</sub>                | 6.5 mm  | Free space, system dimension                                         |
| H <sub>4</sub>                | 41.9 mm |                                                                      |
| H <sub>5</sub>                | 10.8 mm |                                                                      |
| T <sub>5</sub>                | 10 mm   | Thread depth                                                         |
| G <sub>2</sub>                | M8      | fixing screws below (DIN ISO 4762-12.9)                              |
| G <sub>2</sub> M <sub>A</sub> | 41 Nm   | maximum tightening torque                                            |
| A <sub>3</sub>                | 13.6 mm | position lubrication connector                                       |
| N <sub>3</sub>                | M6      | lubrication connector                                                |
| t N <sub>3</sub>              | 6 mm    | maximum permissible screw depth for lubrication connectors           |
| A <sub>4</sub>                | 12.6 mm | position lubrication connector                                       |
| N <sub>4</sub>                | 6 mm    | lubrication connector                                                |
| t N <sub>4</sub>              | 6 mm    | maximum permissible screw depth for lubrication connectors           |
| J <sub>L6</sub>               | 30.4 mm | position lubrication connector                                       |
| N <sub>2</sub>                | 6 mm    | max. diameter of lubrication hole in adjacent construction           |
| J <sub>L5</sub>               | 20.3 mm | position lubrication connector                                       |
| G <sub>S</sub>                | M4x4    |                                                                      |
| O                             | 10x1,5  | O-Ring DIN 3771                                                      |

