


RWU25-E-L

循环滚子轴承滑块


直线循环滚珠轴承和导轨组件，带有满装循环滚珠系统的长滑块，油润滑或脂润滑

技术信息

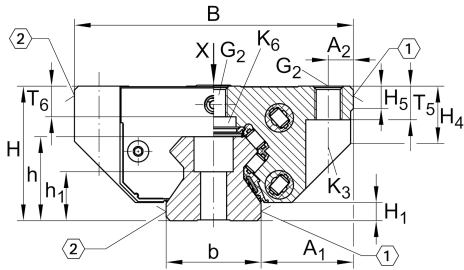

主要尺寸和性能数据

H	36 mm	height system
B	70 mm	width carriage
L	107 mm	overall length carriage
C	33,500 N	dynamic load rating
C ₀	82,000 N	dynamic load rating
M _{0x}	440 Nm	static moment rating about X axis
M _{0y}	1,200 Nm	static moment rating about Y axis
M _{0z}	1,080 Nm	static moment rating about Z axis
≈m	0.86 kg	重量

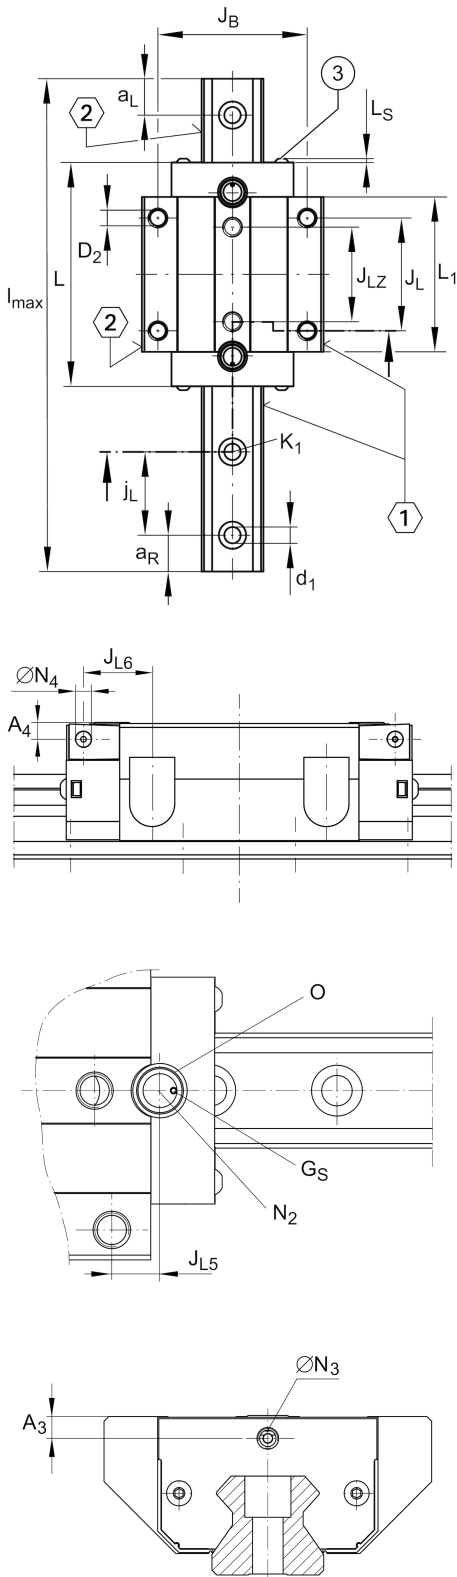


安装尺寸

A_1	23.5 mm	Distance from locating edge on carriage to locating edge on guideway
J_B	57 mm	
b	23 mm	width rail
A_2	6.5 mm	Distance from locating edge to hole
L_1	82.2 mm	
L_S	2.2 mm	
J_L	45 mm	
J_{LZ}	40 mm	
H_1	6.5 mm	Free space, system dimension
H_4	17.8 mm	
H_5	5.25 mm	
T_5	10 mm	Thread depth
T_6	8.5 mm	
G_2	M8	fixing screws below (DIN ISO 4762-12.9)
$G_2 M_A$	24 Nm	maximum tightening torque
K_3	M6	fixing screws below (DIN ISO 4762-12.9)
$K_3 M_A$	17 Nm	maximum tightening torque
K_6	M6	fixing screws below (DIN 7984-8.8)
$K_6 M_A$	10 Nm	maximum tightening torque
D_2	6.7 mm	bore diameter
A_3	7.5 mm	position lubrication connector
N_3	M6	lubrication connector
$t N_3$	6 mm	maximum permissible screw depth for lubrication connectors
N_2	3 mm	max. diameter of lubrication hole in adjacent construction
J_{L5}	22.8 mm	position lubrication connector
G_S	M4x4	
O	10x1,5	O-Ring DIN 3771



附加信息

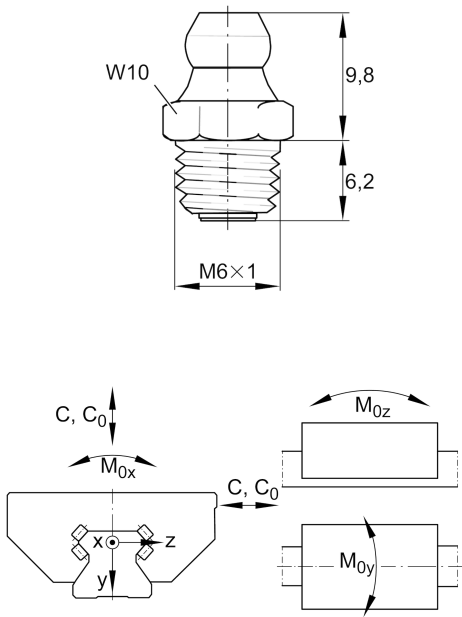

VMKB_065

RWU

Material name