


RWU25-E-HL [🔗](#)

循环滚子轴承滑块

满装循环滚珠系统的高窄长滑块，用于直线循环滚珠轴承和导轨组件，用于油润滑和脂润滑

技术信息

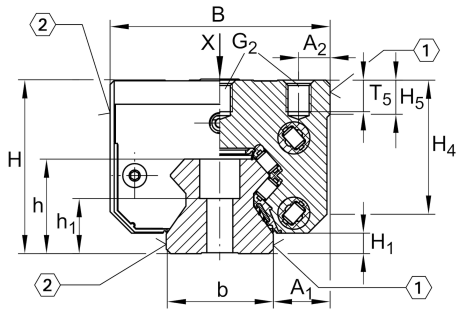

主要尺寸和性能数据

H	40 mm	height system
B	48 mm	width carriage
L	107 mm	overall length carriage
C	33,500 N	dynamic load rating
C ₀	82,000 N	dynamic load rating
M _{0x}	440 Nm	static moment rating about X axis
M _{0y}	1,200 Nm	static moment rating about Y axis
M _{0z}	1,080 Nm	static moment rating about Z axis
≈m	0.72 kg	重量



安装尺寸

A ₁	12.5 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	35 mm	
b	23 mm	width rail
A ₂	6.5 mm	Distance from locating edge to hole
L ₁	82.2 mm	
L _S	2.2 mm	
J _L	50 mm	
H ₁	6.5 mm	Free space, system dimension
H ₄	32.5 mm	
H ₅	5.25 mm	
T ₅	7.5 mm	Thread depth
G ₂	M6	fixing screws below (DIN ISO 4762-12.9)
G2 M _A	17 Nm	maximum tightening torque
A ₃	11.5 mm	position lubrication connector
N ₃	M6	lubrication connector
t N ₃	6 mm	maximum permissible screw depth for lubrication connectors
N ₂	3 mm	max. diameter of lubrication hole in adjacent construction
J _{L5}	20.3 mm	position lubrication connector
G _S	M4x4	
O	10x1,5	O-Ring DIN 3771

附加信息

VMKB_065	RWU	Material name
----------	-----	---------------

