

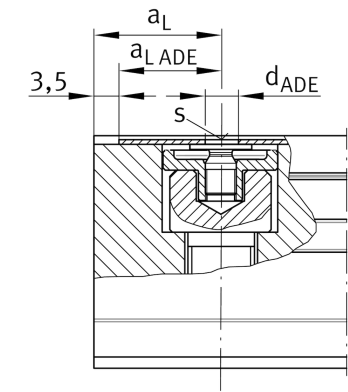


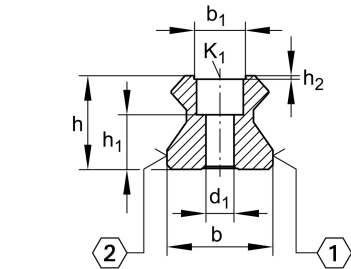

技术信息

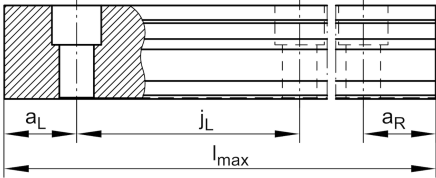

主要尺寸和性能数据

h	38 mm	Height
b	45 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	9.4 kg/m	重量

安装尺寸


K ₁	M12	Fixing screws (DIN ISO 4762-12.9)
d ₁	13.4 mm	bore diameter
K1 M _A	140 Nm	Tightening torque

尺寸

l _{max}	5,985 mm	Max length single piece guideway
a _{L min}	20 mm	Distance
a _{L max}	41 mm	Distance
a _{R min}	20 mm	Distance
a _{R max}	41 mm	Distance
j _L	52.5 mm	Increment
h ₁	19.5 mm	Length
Tol h ₁	0.5 mm	Upper tolerance
Tol h ₁	-0.5 mm	Lower tolerance
h ₂	1.1 mm	Depth
b ₁	22 mm	Width
d _{ADB}	3.9 mm	Bore diameter
s	0.6 mm	Thickness



附加信息



RWU45-E-...; RWU45-F-...	usable carriage(s)
RUE45-E-...; RUE45-F-...	Usable linear systems