




TSX55-E

修形轨道

技术信息

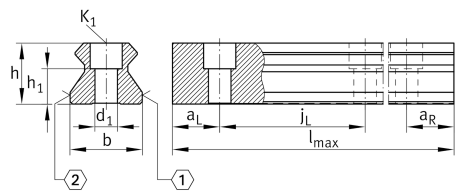

主要尺寸和性能数据

h	45 mm	Height
b	53 mm	Width
Tol b	-0.005 mm	Upper tolerance
Tol b	-0.035 mm	Lower tolerance
≈m	13.1 kg/m	重量

安装尺寸

K ₁	M14	Fixing screws (DIN ISO 4762-12.9)
d ₁	15.4 mm	bore diameter
K1 M _A	220 Nm	Tightening torque

尺寸

l _{max}	5,880 mm	Max length single piece guideway
a _{L min}	20 mm	Distance
a _{L max}	47 mm	Distance
a _{R min}	20 mm	Distance
a _{R max}	47 mm	Distance
j _L	60 mm	Increment
h ₁	22.5 mm	Length
Tol h ₁	0.5 mm	Upper tolerance
Tol h ₁	-0.5 mm	Lower tolerance

附加信息

RWU55-E-...; RWU55-F-...	usable carriage(s)
RUE55-E-...; RUE55-F-...	Usable linear systems